


# Empotrable sumergible rectangular

## Waterproof recessed rectangular



Luminaria | Spotlight

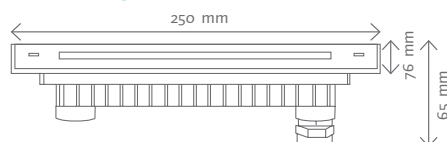

Nicho | Recessed




IP68



RoHS COMPLIANT




ERS6x2S-BC



Flux out 154,0lm	High	Angle 68°	Diameter
431,1/1640lx	0,5		67,45cm
107,7/410,0lx	1		134,90cm
47,90/182,2lx	1,5		202,35cm
26,94/105,5lx	2		269,8cm
19,7/45,5lx	3		404,71cm

ERS6x2A-BF



Flux out 107,3lm	High	Angle 52°	Diameter
559,8/1814lx	0,5		49,42cm
139,9/453,3lx	1		98,85cm
62,18/201,5lx	1,5		148,27cm
34,98/113,3lx	2		197,99cm
16,44/50,3lx	3		296,54cm

**Empotrable sumergible rectangular con haz de luz simétrico o asimétrico. Fabricado con cuerpo y embellecedor de acero 316. Cristal templado de 8mm. Incluye nicho empotrable para su instalación. Para el funcionamiento de los equipos RGB (4 cables) será preciso un controlador tipo PWM. Instalación ideal para piscinas, estanques...**

Rectangular waterproof recessed beam symmetrical or asymmetrical. Made with steel body 316. 8mm tempered glass. Installation recessed enclosed. RGB (4-wire) control will require PWM driver. Ideal for pools, ponds...

	ESR6x2S-BF	ESR6x2S-BC	ESR6x2S-RGB	ESR6x2A-BF	ESR6x2A-BC	ESR6x2A-RGB
Color Color						
Temp. Temp.	6000°K	3000°K	RGB	6000°K	3000°K	RGB
Alimentación Power supply	24V DC					
Protección Protection	IP68					
Tipo de LED LED Type	6 LEDES 2W					
Flujo lum. Lum. flow	808lm	688lm	R79/G166/B43	808lm	688lm	R83/G170/B45
Ángulo Angle	Symmetric 30°			Asymmetric 50-35°		
Consumo Consume	15W		20W	15W		20W